

**Polymer
PTC Devices**

R-line resettable fuses

Shanghai Wayon Thermo/Electro Materials Co.,Ltd.
4th Floor, No.201, New Jinqiao Road, Shanghai 201206,China
Tel: 86-21- 50320161 58995165 Fax: 86-21-50320266
E-mail: market@way-on.com [Http://www.way-on.com](http://www.way-on.com)



LP16-400


Features

- Radial leaded devices
- Faster tripping, typical application in micro-motors for automobiles
- Protecting against overcurrent and overtemperature faults
- Agency Recognition: UL、CSA、TUV




Product Dimensions (mm)

Part number	A	B	C	D	E	F	Lead
	Max.	Max.	Typ.	Min.	Max.	Typ.	Size()
LP16-400	9.6	13.8	5.1	7.6	3.0	1.2	0.8

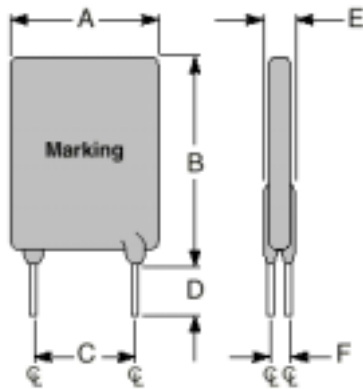

Marking system

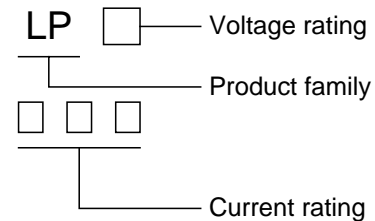

* Lead materials: Tin-plate metal wire.

* Lead-free devices are available,
the right logo is lead-free mark of wayon.



Electrical Characteristics

Part number	I_H (A)	I_T (A)	T_{trip} (S)	V_{max} (V)	I_{max} (A)	Pd_{typ} (W)	R_{min} ()	R_{max} ()
LP16-400	4.0	6.8	3.5	16	100	2.4	0.020	0.063

I_H =Hold current: maximum current at which the device will not trip at 25 still air.

I_T =Trip current: minimum current at which the device will always trip at 25 still air.

T_{trip} =Maximum time to trip at 5 times hold current.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

Pd_{typ} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min} =Minimum device resistance at 25 prior to tripping.

R_{1max} =Maximum device resistance at 25 measured 1 hour post trip.

Thermal Derating Chart- I_H (A)

Part number	Maximum ambient operating temperatures()								
	-40	-20	0	25	40	50	60	70	85
LP16-400	5.9	5.3	4.8	4.0	3.5	3.2	2.8	2.5	1.9

Package Information

Bulk: 1000pcs per bag.

Tape & Reel: 1500pcs per reel.