

**Polymer  
PTC Devices**

*Strap resettable fuses*

**Shanghai Wayon Thermo/Electro Materials Co.,Ltd.**  
4th Floor, No.201, New Jinqiao Road, Shanghai 201206,China  
Tel: 86-21- 50320161 58995165 Fax: 86-21-50320266  
E-mail: [market@way-on.com](mailto:market@way-on.com) [Http://www.way-on.com](http://www.way-on.com)



**LP340**


**Features**

- Strap devices, Axial leaded, Low initial resistance
- Typical used for protection of NiCd/NiMH rechargeable battery packs, Li-ion /Polymer Li-ion battery
- Available in lead-free version
- Agency recognition: UL, CSA, TUV




**Product Dimensions (mm)**

Part number	A		B		C		D		E	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
LP340	25.4	28.5	13.0	13.7	0.6	1.00	5.0	7.3	4.8	5.4

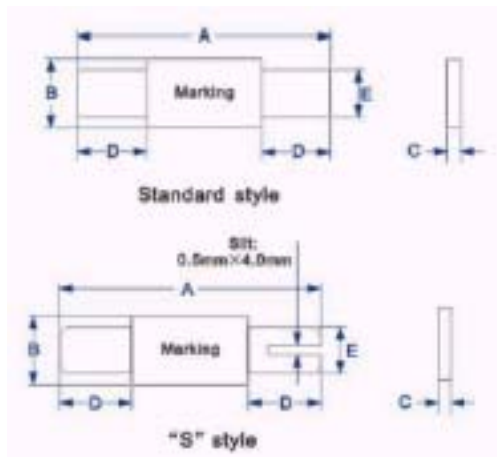

**Marking system**

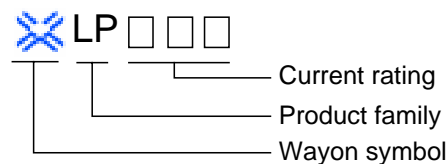

- \* Lead materials: Nickel.
- \* Insulating material: Polyester tape.
- \* Lead-free devices are available, the right logo is lead-free mark of wayon.



**Electrical Characteristics**

Part number	$I_H$	$I_T$	$T_{trip}$		$V_{max}$	$I_{max}$	$R_{min}$	$R_{max}$
	(A)	(A)	Current(A)	Time(S)	(V)	(A)	( )	( )
LP340	3.40	6.80	17.0	5.0	24	100	0.016	0.027

$I_H$ =Hold current: maximum current at which the device will not trip at 25 still air.

$I_T$ =Trip current: minimum current at which the device will always trip at 25 still air.

$T_{trip}$ =Maximum time to trip(s) at assigned current.

$V_{max}$ =Maximum voltage device can withstand without damage at rated current.

$I_{max}$ =Maximum fault current device can withstand without damage at rated voltage.

$R_{min}$ =Minimum device resistance at 25 prior to tripping.

$R_{max}$ =Maximum device resistance at 25 prior to tripping.

**Thermal Derating Chart- $I_H$ (A)**

Part number	Maximum ambient operating temperatures( )									
	-40	-20	0	25	40	50	60	70	85	
LP340	5.60	4.88	4.10	3.40	2.70	2.33	2.00	1.60	0.89	

**Package Information**

Bulk: 500pcs per bag.