

**Polymer
PTC Devices**

Strap resettable fuses

Shanghai Wayon Thermo/Electro Materials Co.,Ltd.
4th Floor, No.201, New Jinqiao Road, Shanghai 201206,China
Tel: 86-21- 50320161 58995165 Fax: 86-21-50320266
E-mail: market@way-on.com [Http://www.way-on.com](http://www.way-on.com)



LPDT210


Features

- Fast tripping resettable circuit protection
- Low internal resistance
- Weldable nickel terminals
- Typical applications in AAA size battery
- Available in lead-free version




Product Dimensions (mm)

Part number	A		B		C	D		E		F	
	Min	Max	Min	Max	Max	Min	Max	Min	Max	Min	Max
LPDT210	16.5	17.5	9.5	10.5	0.9	9.4	10.0	0.8	1.2	5.0	5.2

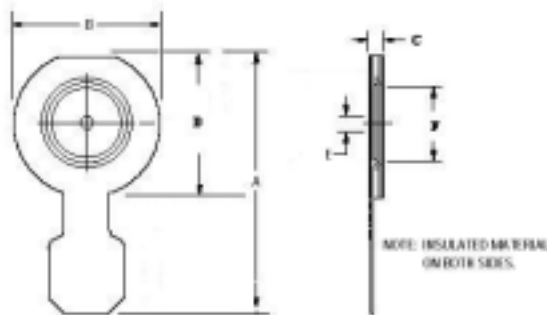

Marking system

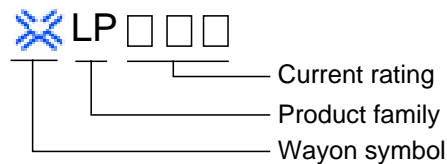

- * Lead materials: Nickel.
- * Insulating material: Polyester tape.

Electrical Characteristics

Part number	I_H (A)	I_T (A)	T_{trip}		V_{max} (V)	I_{max} (A)	R_{min} ()	R_{max} ()
			Current(A)	Time(S)				
LPDT210	2.1	4.7	15	50	10.5	5.0	0.035	0.062

I_H =Hold current: maximum current at which the device will not trip at 25 still air.

I_T =Trip current: minimum current at which the device will always trip at 25 still air.

T_{trip} =Maximum time to trip(s) at assigned current.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

R_{min} =Minimum device resistance at 25 prior to tripping.

R_{max} =Maximum device resistance at 25 prior to tripping.

Thermal Derating Chart- I_H (A)

Part number	Maximum ambient operating temperatures()								
	-40	-20	0	25	40	50	60	70	85
LPDT210	4.00	3.40	2.70	2.10	1.50	1.20	0.90	0.60	0.40

Package Information

Bulk, 1000pcs per bag.