



LP-USM020


Features

- Smaller size of 1210
- Fast tripping resettable circuit protection
- Surface mount packaging for automated assembly
- Agency recognition: UL, CSA, TUV




Product Dimensions (mm)

Part number	A	B	C	D	E
	Max	Max	Max	Max	Min.
LP-USM020	3.43	2.80	1.25	0.60	0.20

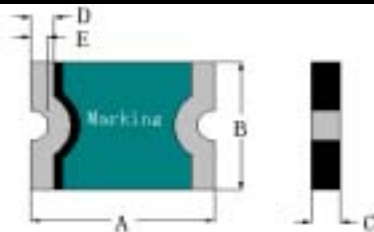

Part Marking System


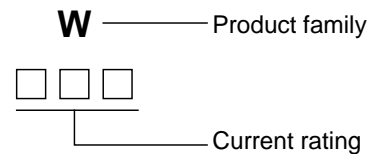


Electrical Characteristics

Part number	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	T_{trip} Current(A) Time(S)	Pd_{typ} (W)	R_{min} ()	R_{1max} ()
LP-USM020	0.20	0.40	30	10	8.0 0.02		0.80	5.0

I_H =Hold current: maximum current at which the device will not trip at 25 still air.
 I_T =Trip current: minimum current at which the device will always trip at 25 still air.
 V_{max} =Maximum voltage device can withstand without damage at rated current.
 I_{max} =Maximum fault current device can withstand without damage at rated voltage.
 T_{trip} =Maximum time to trip(s) at assigned current.
 Pd_{typ} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.
 R_{min} =Minimum device resistance at 25 prior to tripping.
 R_{1max} =Maximum device resistance measured in the nontripped state 1 hour post reflow.

Solder Reflow Recommendations

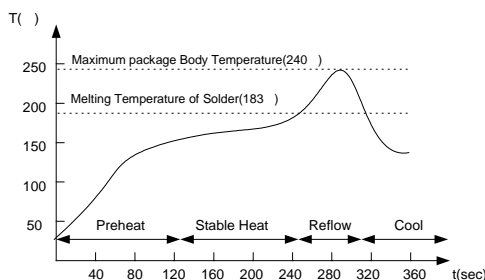

Solder Pad Layouts

Part number	A (mm)	B (mm)	C (mm)
LP-USM020	2.00	1.00	2.50

* Recommended reflow methods: IR, Vapor phase oven, hot air oven, wave solder.

* Devices can be cleaned using standard industry methods and solvents.

Notes:

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Tape & Reel: 2000pcs per reel.