

**Ceramic  
 PTC Device**

*R-line thermistors*

**Shanghai Wayon Thermo/Electro Materials Co.,Ltd.**

15, Lane 1750, Donggao Road, Shanghai 201208, P. R. China

Tel: 86-21-58652154 58995165

Fax: 86-21-58651424

E-mail: [market@way-on.com](mailto:market@way-on.com)

[Http://www.way-on.com](http://www.way-on.com)



**SCA-150-251AUM**


**Features**

- Radial leaded devices
- Flame retardant silicon resin insulating material  
meets UL94 V-0 requirements
- Lead-free soldering
- Rapid switching and rapid resuming



**Product Dimensions (mm)**

Part number	D	T	F	L	Lead
	Max.	Max.	Typ.	Min.	Size( )
SCA-150-251AUM	9.0	5.0	5.0	5.0	0.6

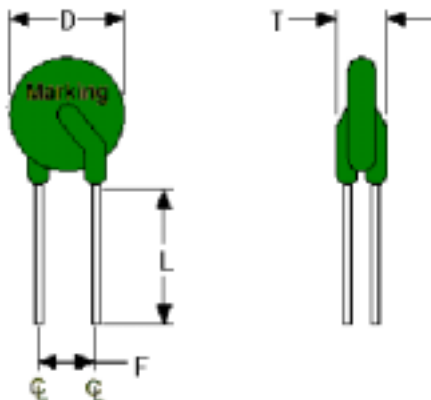

**Marking system**

**SCA-Product family**

**150-Resistance Value**

\* Lead materials: Tin-plate metal wire.

**Electrical Characteristics**

Part number	R(25 ) ( )	V <sub>max</sub> (V <sub>Ac</sub> )	I <sub>H</sub> (mA)	I <sub>T</sub> (mA)	T <sub>f</sub> ( )	Overload Type	Overload Type	Overload Type
SCA-150-251AUM	15 ± 20%	250	120	240	90			

R(25 )=Device resistance at 25

V<sub>max</sub>=Maximum voltage device can withstand without damage at rated current.

I<sub>H</sub>=Hold current: maximum current at which the device will not trip at 25 still air.

I<sub>T</sub>=Trip current: minimum current at which the device will always trip at 25 still air.

T<sub>f</sub>=Curie Point.

Overload Type : 250V, 3A, 60s on, 600s off, 10 times. | R/R| 10%

Overload Type : 10/310 μs, 1.5KV, interval 3min, 10 times. | R/R| 30%

Overload Type : 220V, Rs 10 , 30 min. no arcing, no flame

**Package Information**

Bulk: 200pcs per bag.

Tape & Reel: 1000pcs per reel.