

**Ceramic  
 PTC Device**

*Cuboid thermistors*

**Shanghai Wayon Thermo/Electro Materials Co.,Ltd.**

15, Lane 1750, Donggao Road, Shanghai 201208, P. R. China  
 Tel: 86-21- 58652154 58995165 Fax: 86-21-58651424

E-mail: [market@way-on.com](mailto:market@way-on.com) [Http://www.way-on.com](http://www.way-on.com)



**SCG-0R15-480BYM**

**Features**

- Cuboid devices
- Rapid resuming
- Better stability
- Great current impact endurance


**Typical Applications**

- Automobile air conditioning
- Direct current power supplies
- Heater



**Product Dimensions (mm)**

Part number	A mm	B mm	C mm
SCG-0R15-480BYM	30.0	30.0	1.5

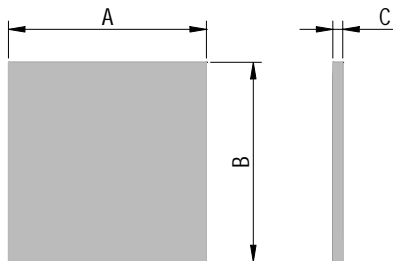

**Marking system**

**SCG-Product family**  
**0R2- Resistance Value**

**Electrical Characteristics**

Part number	R(25 ) ( )	V <sub>max</sub> (V <sub>Dc</sub> )	I <sub>H</sub> (A)	I <sub>T</sub> (A)	I <sub>max</sub> (A)	T <sub>f</sub> ( )
SCG-0R15-480BYM	0.15 ± 20%	48	4	8.0	20.0	130

R(25 )=Device resistance at 25 .

V<sub>max</sub>=Maximum voltage device can withstand without damage at rated current.

I<sub>H</sub>=Hold current: maximum current at which the device will not trip at 25 still air.

I<sub>T</sub>=Trip current: minimum current at which the device will always trip at 25 still air.

T<sub>f</sub>=Curie point.

**Package Information**

Bulk: 200pcs per bag.