Ceramic PTC Device

Cuboid thermistors

Shanghai Wayon Thermo/Electro Materials Co.,Ltd.

15, Lane 1750, Donggao Road, Shanghai 201208, P. R. China Tel: 86-21- 58652154 58995165 Fax: 86-21-58651424 E-mail: <u>market@way-on.com</u> *Http://www.way-on.com*




SCG-5R0-501BUP

Features

- □ Cuboid devices
- □ Rapid resuming
- □ Better stability
- □ Great current impact endurance

Product Dimensions (mm)

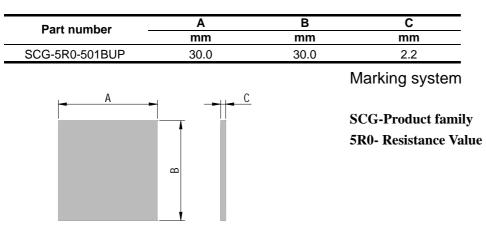

Electrical Characteristics

Part number	R(25)	V _{max}	IH	Ιτ	I _{max}	Т _f
	()	(V _{Ac})	(A)	(A)	(A)	()
SCG-5R0-501BUP	$5.0 \pm 20\%$	500	0.7	1.4	6.0	90

R(25)=Device resistance at 25.

V_{max}=Maximum voltage device can withstand without damage at rated current.

 $I_{H}\!\!=\!\!Hold \; \text{current: maximum current at which the device will not trip at 25 \qquad \text{still air.}$

 I_T =Trip current: minimum current at which the device will always trip at 25 still air.

T_f=Curie point.

Package Information

Bulk: 200pcs per bag.

Typical Applications

Automobile air conditioning Direct current power supplies Heater

