

LBR250H

R-line resettable fuses


Features

- Radial leaded devices, higher rated voltage up to 250V
- Typical use for over-current protection in ballast
- Cured, flame retardant epoxy polymer insulating material meets UL94 V-0 requirements
- Agency Recognition: UL、CSA、TUV



Product Dimensions (mm)

Part number	A	B	C	D	Lead
	Max	Min	Typ.	Max	Size()
LBR250H	7.5	7.6	5.1	3.1	0.6

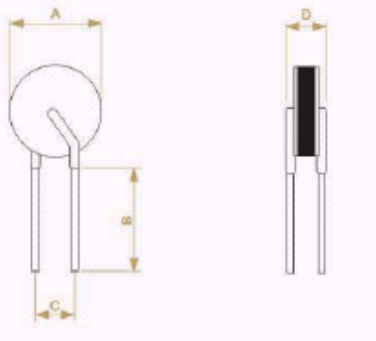

* Lead materials: Tin-plate metal wire.

* Lead-free devices are available,
the right logo is lead-free mark of wayon.



Electrical Characteristics

Part number	I_H (A)	I_T (A)	T_{trip} (S)	V_{max} (V)	I_{max} (A)	Pd_{typ} (W)	R_{min} ()	R_{max} ()
LBR250H	0.25	0.50	10	250	20	1.75	0.80	2.00

I_H =Hold current: maximum current at which the device will not trip at 25 °C still air.

I_T =Trip current: minimum current at which the device will always trip at 25 °C still air.

T_{trip} =Maximum time to trip at 3 times hold current.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

Pd_{typ} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min} =Minimum device resistance at 25 °C prior to tripping.

R_{max} =Maximum device resistance at 25 °C prior to tripping.

Thermal Derating Chart- $I_H(A)$

Part number	Maximum ambient operating temperatures(°C)								
	-40	-20	0	25	40	50	60	70	85
LBR250H	0.38	0.33	0.28	0.25	0.21	0.18	0.16	0.14	0.10

Package Information

Bulk: 1000pcs per bag.

Tape & Reel: 1500pcs per reel.