



LP30-185

R-line resettable fuses


Features

- Radial leaded devices
- Cured, flame retardant epoxy polymer insulating material meets UL94 V-0 requirements
- Agency Recognition: UL、CSA、TUV




Product Dimensions (mm)

Part number	A	B	C	D	E	F	Lead
	Max.	Max.	Typ.	Min.	Max.	Typ.	Size()
LP30-185	10.7	17.0	5.1	7.6	3.0	0.9	0.6

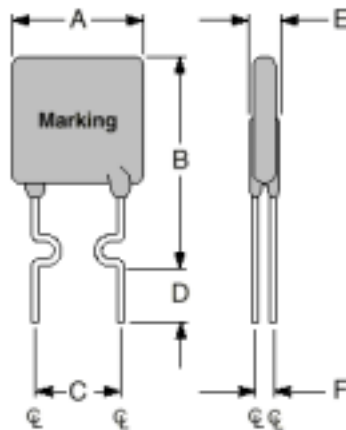

Marking system

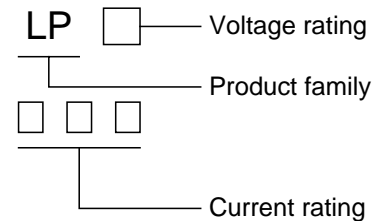

- * Lead materials: Tin-plate metal wire.
- * Lead-free devices are available, the right logo is lead-free mark of wayon.



Electrical Characteristics

Part number	I_H (A)	I_T (A)	T_{trip} (S)	V_{max} (V)	I_{max} (A)	Pd_{typ} (W)	R_{min} ()	R_{max} ()
LP30-185	1.85	3.70	8.7	30	40	1.27	0.03	0.06

I_H =Hold current: maximum current at which the device will not trip at 25 still air.

I_T =Trip current: minimum current at which the device will always trip at 25 still air.

T_{trip} =Maximum time to trip at 5 times hold current.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

Pd_{typ} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

Thermal Derating Chart- $I_H(A)$

Part number	Maximum ambient operating temperatures()								
	-40	-20	0	25	40	50	60	70	85
LP30-185	2.87	2.59	2.28	1.85	1.63	1.52	1.33	1.21	1.05

Package Information

Bulk: 1000pcs per bag.

Tape & Reel: 1500pcs per reel.